


Infrognito Updates 08/2022

The second paragraph on page two should read:

CUTTING BACKGROUND PIECES:

First cut a $6\frac{3}{4}$ " strip from a background fabric piece. From this cut three (***four**) $6\frac{3}{4}$ " squares and cut these in half diagonally **Figure D**. Cut off three (***four**) $3\frac{1}{2}$ " pieces from the remainder of this strip and stack. Glue baste your background template piece **4**. on top of these and trim out background pieces.

Now cut one (**two**) $1\frac{3}{4}$ " strip(s) from the remaining fabric. (These are for the right and bottom edges of your frog blocks.)

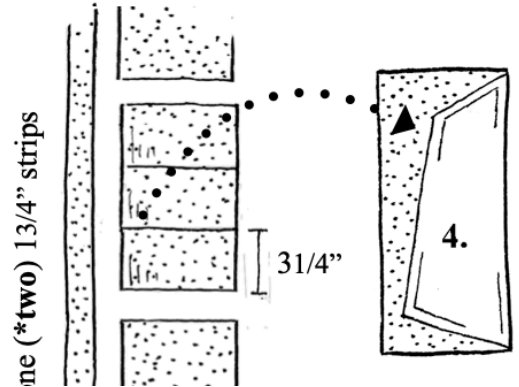

The first paragraph on page three should read:

Iron seams towards the body piece and trim the belly piece flush as shown **Figure I**.

Attach bottom leg piece:

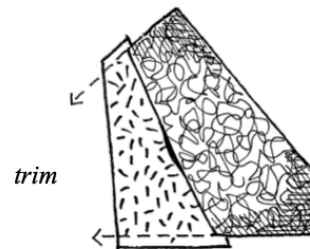


Figure I.

Iron seam towards frog body. Trim edges of belly even with body as shown.